



Stronger. Safer. Infrastructure.®


AEGION PRESSURE PIPE CAPABILITIES

Product	Applications							Diameter	Thickness	Max Continuous Install Length	Max. Temp.	Max. Pressure	AWWA Classification		Bends
	Potable Water	Wastewater	Irrigation/ Raw Water	Fire Suppression	Industrial	Electric/ Fiber	Casing						Class III	Class IV	
InsituMain®	X	X	X	X	X			06" - 72"	5mm - 28.5mm +/-	1,200'	130°F	250 psi	X	X	up to 45°
Tite Liner®	*X	X	X	X	X	X		02" - 52"	DR 9 - DR 41	5,000'	140°F	140 psi	X	X	up to 11.25°
Tyfo® Fibrwrap®	X	X	X	X	X			30" and above	4mm - 20mm	Unlimited	150°F	450 psi	X	X	Any
Fusible C-900®	X	X	X	X	X	X	X	04" - 12"	DR 14, 18, 21, 25	7,000'	140°F	305 psi		X	N/A
Fusible C-905®	X	X	X	X	X	X	X	14" - 36"	DR 14, 18, 21, 25, 32.5	7,000'	140°F	305 psi		X	N/A
Fusible PVC®	X	X	X	X	X	X	X	04" - 36"	SCH40 or SCH80	7,000'	140°F	305 psi		X	N/A

Note: Pipe size and operating temperature may limit maximum pressure for a given application

*To be evaluated on a case by case basis

AEGION PRODUCT MATRIX BY MAXIMUM INTERNAL OPERATING PRESSURE

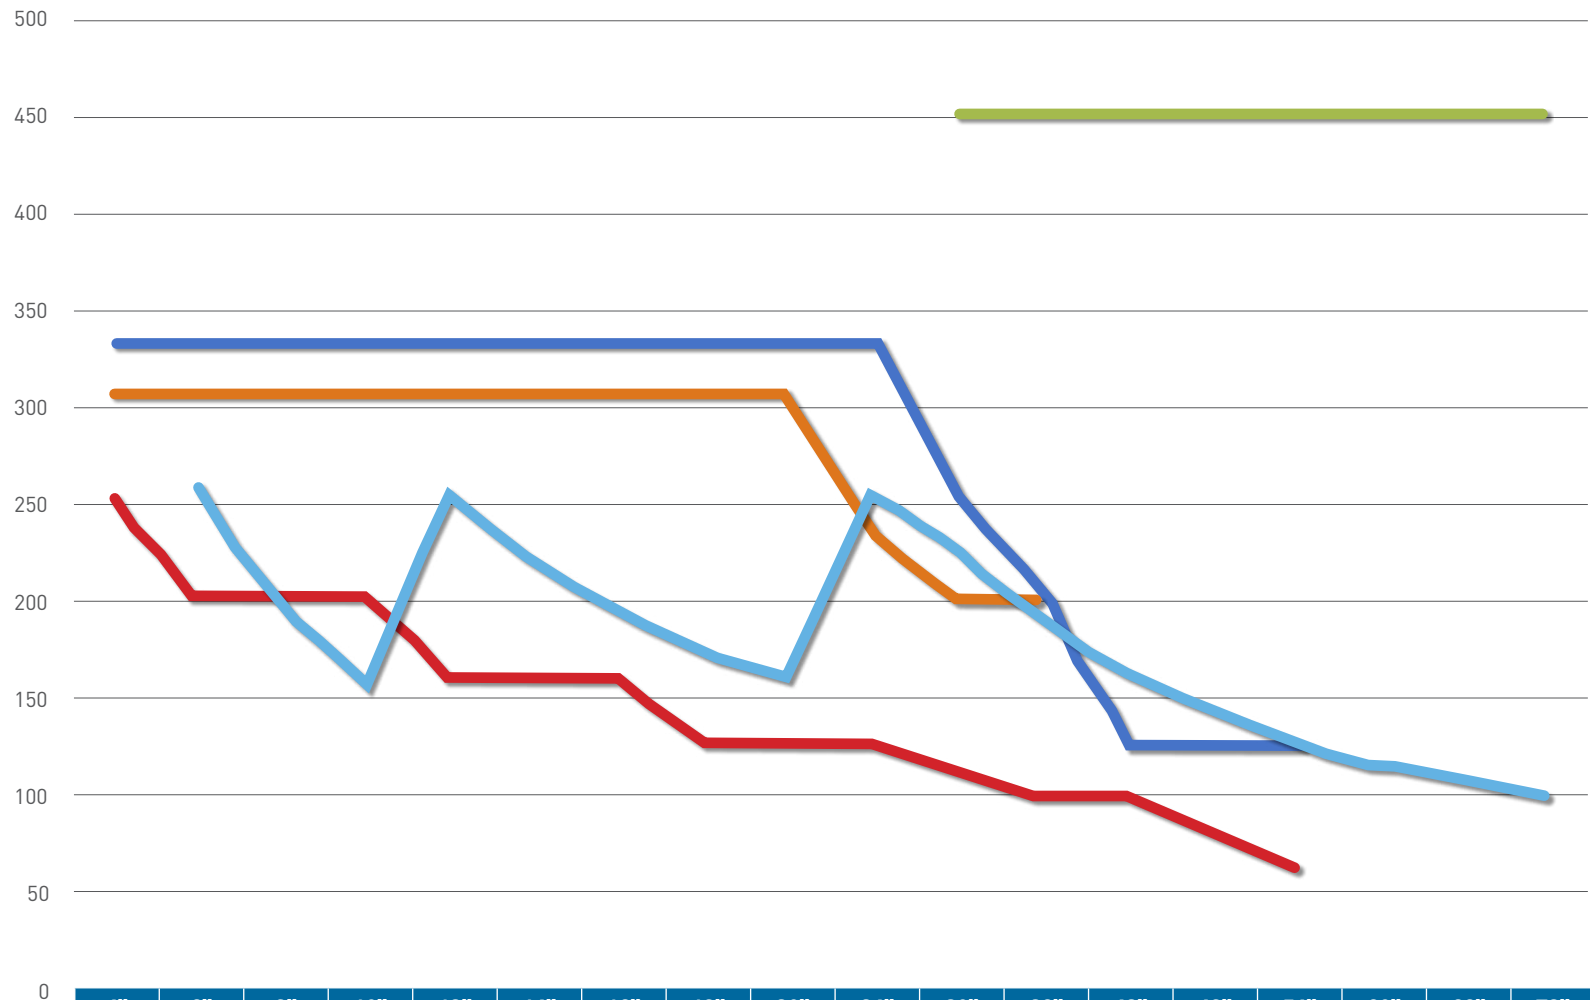

	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	30"	36"	42"	48"	54"	60"	66"	72"
InsituMain®		258	195	160	255	220	195	175	161	256	227	190	165	145	130	115	108	100
Tite Liner®	305	305	305	305	305	305	305	305	305	235	200	200	-	-	-	-	-	-
Fusible PVC®	252	202	202	202	161	161	161	126	126	126	112	101	101	81	64	-	-	-
HDPE Slip Lining	333	333	333	333	333	333	333	333	333	333	250	200	125	125	125	-	-	-
Tyfo® Fibrwrap®	-	-	-	-	-	-	-	-	-	-	450	450	450	450	450	450	450	450