

UNITED PIPELINE SYSTEMS

Product and service offerings



PRODUCT AND SERVICE OFFERINGS

United Pipeline Systems has installed over 20,000 miles of Tite Liner® and Safetyliner® in more than 30 countries worldwide. United's products ranges in diameter from 2 to 52 inches with operating pressures up to 7,500 psi.




Liner Systems

- **Tite Liner®**
An engineered compressed fit thermoplastic liner system for the prevention of internal corrosion
- **Safetyliner®**
Our Tite Liner® system with external grooves allowing for the management of gas permeation
- **Tite Liner® RT**
Tite Liner® RT (raised temperature PE) Our Tite Liner® system utilizing bimodal polyethylene material for service conditions with elevated temperature
- **Tite Liner® HC**
Tite Liner® HC (PA-12 for hydrocarbon service) - Our Tite Liner® system utilizing ultra high-performance polymer material for hydrocarbon service and/or elevated temperature
- **Lined Fittings**
Shop applied lining of fittings, bends and other metallic structures



Liner Connections

- **Tite Liner® Flange Connection**
Standard raised face weld neck flange with engineer spacer ring
- **Slurry Flange™ Connection**
Unique flange connection for use in slurry and non-slurry pipelines
- **WeldTite® CRA Welded Connection**
Allows for the connection of two thermoplastic lined sections of pipe without the use of flanges
- **WeldTite® EF Welded Connection**
Allows for the connection of two thermoplastic lined sections of pipe without the use of flanges

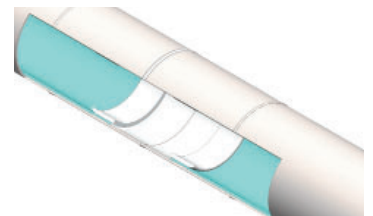

Integrity Management

- **Monitoring/Venting System** Allows for the capture and anagement of permeated gas
- **Gas Reinjection System**
Allows for the capture and inline reinjection of permeated gas
- **Integrity Monitoring & Maintenance Program**
Monitoring and maintenance programs are available from United



United Pipeline Systems, Inc.
135 Turner Drive
Durango, CO 81303
970.259.0354
www.unitedpipeline.com